



TRAD SAFETY DECK

ERECTION GUIDE



STAGE 1

Firstly load out the area requiring the decking. Pin and secure the head and footplate to the leg unit. Starting in one corner of the room, stand two legs angled towards the wall. Lift the full panel into the head of the leg units, making sure you have another two legs within reaching distance. Now put the other two legs under the panel to support the deck. **(Note: You can angle the two legs towards the wall to keep the system supported).**



STAGE 2

Taking another panel, lift one end into the heads of the first panel, again making sure that you have two legs within reaching distance. Put the next two legs under the second panel to support the deck. Continue erecting the decks in one direction until you come to the end of the room. **(Note: Use intermediate panels if the standard panel will not fit).**



STAGE 3

Erect the second row of panels in the same direction as the first row. Continue this process until the room is fully decked out and laterally supported by all four walls.



STAGE 4

Once the room is completely decked, the safety pins need to be fixed through the head and panels to secure each leg and make the system a complete unit.


VERSATILITY

In the event of you not having some of the smaller panels available it may be necessary to overlap with a 1m x 1m panel to either extend the decking into the wall or cover a gap. This is illustrated in stages 5 & 6.



STAGE 5

Where possible cam-strap this panel to the existing system and pack up the legs from underneath, using an additional base to gain the height required to support the lap.

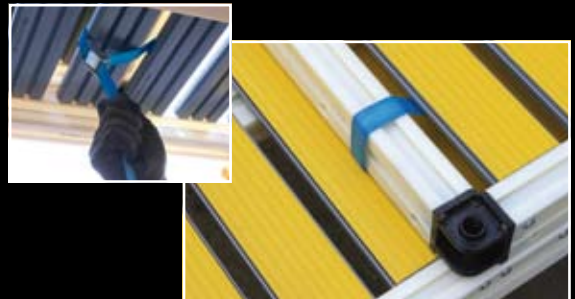

STAGE 6

Secure the lap using the cam straps provided, making sure that when the straps are tightened they pull the deck into the walls, leaving the system rigid and free from movement. Reverse the installation process for dismantling.

08450 50 70 50

www.tradsafetysystems.co.uk

TRAD
SAFETY SYSTEMS LTD